

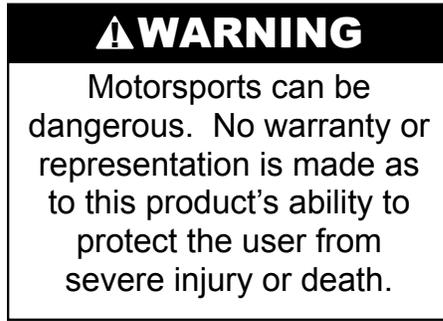



Seat Belt


When mounting and adjusting your harness, it is vital that the Sternum Strap, if applicable, sit across the chest and is a minimum of 4" below the neckline. Harness, Shoulder, Lap Belts, and Anti-Submarine Belt (if applicable) must be firmly tightened against body **at all times** to help prevent injury or death. Effectiveness and longevity of this equipment is directly related to how it is installed, used, and maintained. User assumes all responsibility to ensure all warnings and directions are followed.

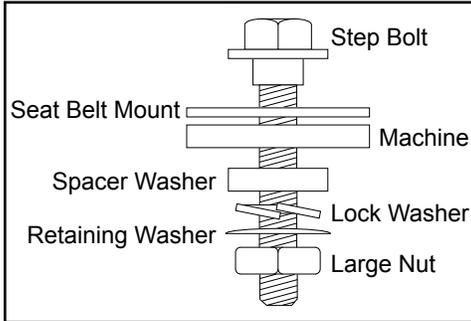

Mounting Brackets are to be installed at an angle that is the same as the direction of pull. Preferred mounting is as shown above. Ensure there are no welds around Belt or Belt Hardware. All mounting points are to be directly to frame of vehicle chassis. Belts are to be mounted so that drivers forward and upward movement are limited.

In the event of an accident, belts will move in direction of impact. Ensure there is adequate clearance around belts to avoid any abrasions or cuts. Keep belts away from all heat sources such as muffler, exhaust components, etc.

! IMPORTANT Be sure to lock Slide Adjusters as shown. Slide Adjusters should be located as close as possible to the bolt in Mounting Bracket. In order to properly lock belts into place, and prevent loosening while driving or during an accident, it is very important to follow these attaching instructions.

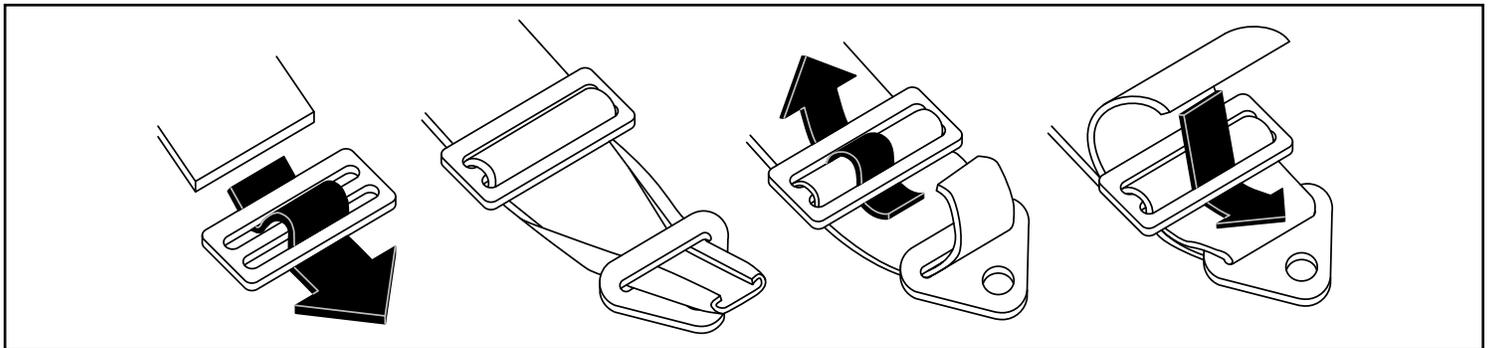

Read instructions and view illustrations before beginning.

Need help with your installation?



sales@superatv.com



www.superatv.com



1-812-574-7777



8:00am - 9:00pm EST M-Th
8:00am - 7:00pm EST Friday
9:00am - 2:00pm EST Saturday

Thank You
For Choosing

SUPERATV.COM

Liability Statement

SuperATV's products are designed to best fit users ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory, or aftermarket, parts will void any warranty provided by SuperATV and is not recommended. SuperATV's products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV to verify that they will work together.

Although SuperATV has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV products, user agrees that should damages occur, SuperATV will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV will warranty only parts provided by SuperATV. Any damage or problems with OEM housings, bearings, seals, or other manufacturers products will not be covered by SuperATV. SuperATV parts and products are not warranted if item was not installed properly, misused, or modified.